


PRO Series Distribution Frames

11-way and 27-way distribution frames with stainless steel rods to suit our 10-pair IDC connection modules. Key lockable metal lids with cable entry knockouts on all sides and inbuilt record holder are available separately.

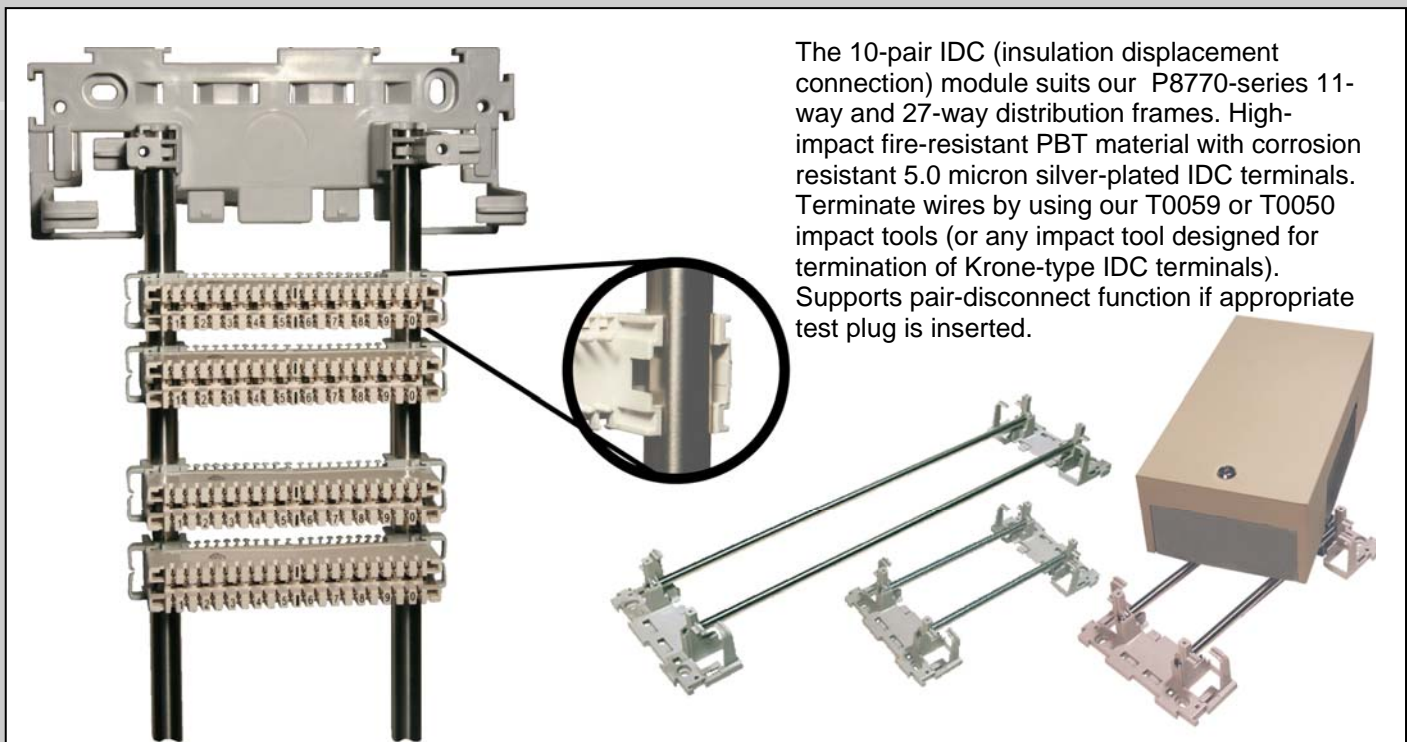

The 10-pair IDC (insulation displacement connection) module suits our P8770-series 11-way and 27-way distribution frames. High-impact fire-resistant PBT material with corrosion resistant 5.0 micron silver-plated IDC terminals. Terminate wires by using our T0059 or T0050 impact tools (or any impact tool designed for termination of Krone-type IDC terminals). Supports pair-disconnect function if appropriate test plug is inserted.

Cat #	Item	Module Compatibility	Dimensions
P8771-PRO	11-way Frame	P8710-PRO	360(L) x 195(W) x 75(D)mm
P8772	11-way Lid		375(L) x 200(W) x 125(D)mm
P8777-PRO	27-way Frame	P8710-PRO	725(L) x 195(W) x 75(D)mm
P8778	27-way Lid		730(L) x 200(W) x 125(D)mm
P8710-PRO	10-pair IDC disconnect module		

Sydney (Head Office)

Tel: (02) 9414 8888

Fax: (02) 9414 8800

sales@accesscomms.com.au

Melbourne

Tel: (03) 9330 8333

Fax: (03) 9330 8330

melbourne@accesscomms.com.au

Brisbane

Tel: (07) 3308 5555

Fax: (07) 3308 5500

brisbane@accesscomms.com.au

www.accesscomms.com.au