


P2330 Series Category 5 Splitter

P2332, P2334, P2335, P2336, P2337

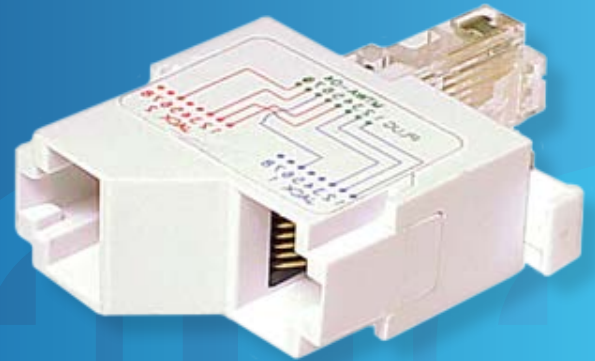


FEATURES

- Cat-5E splitters enable 2 different devices to share the same cable and outlet.
- They are usually used in pairs, one at the outlet and one at the patch panel.
- Narrow design is ideal for high-density patch panels because the two sockets are mounted vertically to avoid blocking neighbouring sockets.
- Several standard wiring variants are available.
- Five different wiring configurations are available.
- The wiring configuration diagram is printed on the side of each splitter.

CAT#	TYPE	LENGTH
P2332	Cat5	VV Splitter #2
P2334	Cat5	DD Splitter #2
P2335	Cat5	VV Splitter #5
P2337	Cat5	1-1 Splitter#7

PRODUCT DRAWING


P2332



Splits a 4-pair 568B jack; pairs 1 & 2 to jack 1 and pairs 3 & 4 to jack 2.

Typical application would be voice at both jacks.


P2335



Splits a 4-pair 568A jack; pairs 1 & 2 to jack 1 and pairs 3 & 4 to jack 2.

Typical application would be voice at both jacks


P2334



Splits a 4-pair 568A / 568B jack; pairs 2 & 3 to jack 1 and pairs 1 & 4 to jack 2.

Typical application would be data (10Base-T) at both jacks.

P2337



Provides a second paralleled jack.