

18 AWG Solder Tube Red

P0720018RED



FEATURES

Solder sleeve wire splice is a low-cost easy installation cable joiner. It consists of transparent heat shrinkable sleeve and fluxed solder that melts around the cable when heated up to provide insulation and make cable waterproof. Simply join two cables together and slide the middle of solder sleeve on the contact point. Use a heat gun to melt heat shrink and solder until it contacts closely with cable jacket.

In-line wire splices

Fully recovery temperature: 130°C

Temperature of fully solder melt: 150°C

CHARACTERISTICS

- Shrinking Ratio 2 : 1
- Waterproof for Wiring Splices
- Transparent Sleeve Provides precise inspection
- Easy Control Soldering process


OPERATING TEMPERATURE RANGE

Operating Temperature	: -55°C ~ 125°C
Minimum Shrink Temperature	: 80°C
Starting Temperature of Solder Melt	: 138°C
Minimum fully recovery temperature	: 160°C

TECHNICAL INDICATORS

MAX operating Temperature	: -55°C ~ + 125°C
Shrinking Temperature	: >160°C
Dielectric Strength	: 1kV
Protection Type	: IP67

1. Heat Shrinkable Tubing
2. Low Temperature Solder Sleeve
3. Waterproof hot melt adhesive

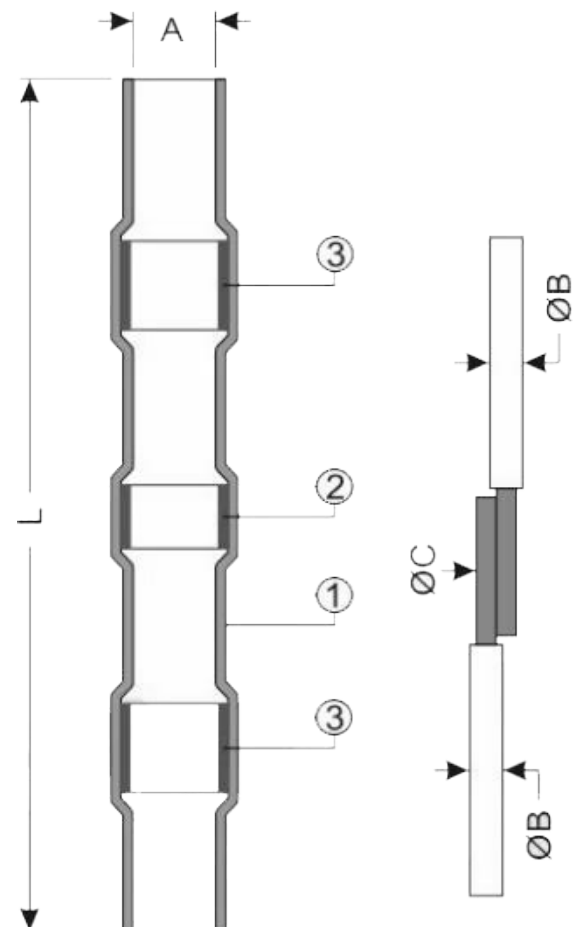

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Office
Melbourne Office
Adelaide Office

33-35 Alleyne Street, Chatswood, NSW, 2067
 28 The Gateway, Broadmeadows, VIC, 3047
 71 Znac Highway, Ashford, SA, 5035

Phone: (02) 9414 8888
 Phone: (07) 3308 5555
 Phone: (03) 9330 8333
 Phone: (08) 8338 5540

Fax: (02) 9414 8800
 Fax: (07) 3308 5500
 Fax: (03) 9330 8330

websales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au