


RG59 / U Coaxial Cable Copper Core for CCTV/Security Camera and TV

Y8057-002, Y8056-002, Y8053-003, Y8055-002

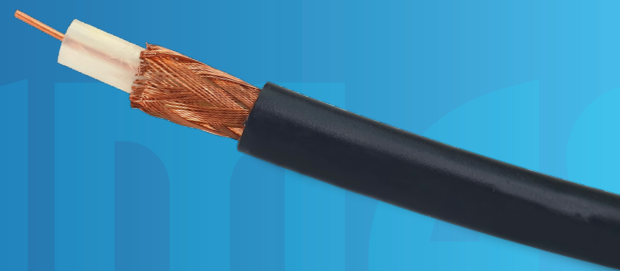

FEATURES

RG59/U coaxial cable for CCTV/Security Camera and TV use.

Braided copper shield please delete and dielectric is solid PE. Solid copper conductor.


Black jacket with count-down metremarking.

Supplied on 100 metre, 250 metre or 500 metre strong polypropylene reels or 305 metre reel-in-a-box.

SKU	COLOUR	LENGTH	PACKAGING
Y8057-002	BLACK	100M	REEL
Y8056-002	BLACK	250M	REEL
Y8053-003	BLACK	305M	REEL-IN-A-BOX
Y8055-002	BLACK	500M	REEL

ELECTRICAL CHARACTERISTICS

ITEM	DESCRIPTION
Characteristic Impedance	75 ± 3 Ω
Nominal Velocity of Propagation	82 %
Insulation Resistance	≥ 1000 mega ohms-km at 20°C
Dielectric Test	1000V DC / 1 min ; No Breakdown
Temperature Rating	60°C
Voltage Rating	30V

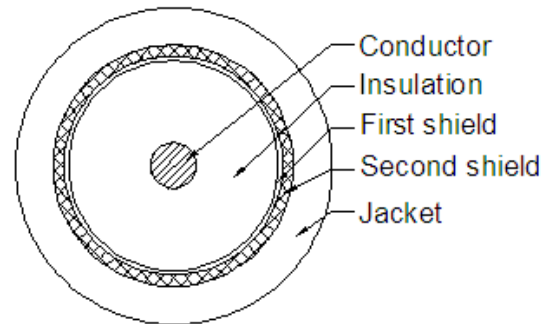

CONSTRUCTION

ITEM			
CONDUCTOR	Material	Material	
	Construction	1 / 0.64 ± 0.01mm	
INSULATION	Material	SPE	
	Diameter	3.7 ± 0.2 mm	
SHIELD	Material	AL Foil	
	Coverage	100 % Coverage & 25 % Overlapping	
BRAID	Material	Copper	
	Structure	16 / 6 / 0.10mm	
JACKET	Material	PVC	
	Normal Thickness	0.80 ± 0.05mm	
	Diameter	6.0 ± 0.3mm	
	Colour	Optional	
MARKING	Datamaster® Y8050 SERIES RG59/U (Cu) 75 OHM COAXIAL CABLE		

To view Access' extensive ranges go to: www.accesscomms.com.au