

Cat5e Stranded Conductor UTP Cable

Y8100/Y8101/Y8103 Series Bulk Cable



FEATURES

Our quality Cat-5E stranded conductor cable is suitable for assembly of patch cords. 4 twisted pairs 24AWG with 7/0.20mm² stranded conductors. Available on 100 and 305 metre reels or in durable 305 metre 5-ply pull-boxes. Count-down metremarking.

CAT#	COLOUR	LENGTH	PACKING
Y8100ASH	Ash	305 Metre	Pull Box
Y8100BLK	Black	305 Metre	Pull Box
Y8101BLU	Blue	100 Metre	Reel
Y8100BLU	Blue	305 Metre	Pull Box
Y8100GRN	Green	305 Metre	Pull Box
Y8100GRY	Green	305 Metre	Pull Box
Y8100ORA	Orange	305 Metre	Pull Box
Y8100PNK	Pink	305 Metre	Pull Box
Y8100PUR	Purple	305 Metre	Pull Box
Y8100RED	Red	305 Metre	Pull Box
Y8103RED	Red	305 Metre	Reel
Y8100WHI	White	305 Metre	Pull Box
Y8103WHI	White	305 Metre	Reel
Y8100YEL	Yellow	305 Metre	Pull Box

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Office
Melbourne Office
Adelaide Office

33-35 Alleyne Street, Chatswood, NSW, 2067
28 The Gateway, Broadmeadows, VIC, 3047
71 Anzac Highway, Ashford, SA, 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540


Fax: (02) 9414 8800
Fax: (07) 3308 5500
Fax: (03) 9330 8330
Mob: 0438 245 116

websales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

Cat5e Stranded Conductor UTP Cable

Y8100/Y8101/Y8103 Series Bulk Cable

DESIGN & CONSTRUCTION

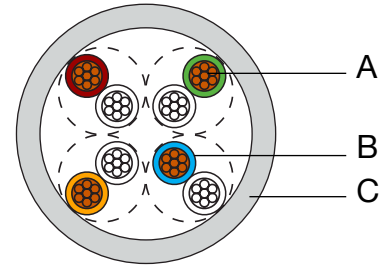

ITEM	DESCRIPTION	COLOUR	SPECIFICATION	MATERIALS
A	Conductor	Copper	8/0.203(+/-0.008)mm	Bare Copper
B	Insulation	Orange/White with Orange, Blue/White with Blue, Green/White with Green, Brown/White with Brown	8/1.01(+/-0.13)mm	SPE
C	Jacket	Various	5.50(+/-0.20)mm	FR-PVC

FREQUENCY (MHZ)	ATTENUATION (+/-15%dB)	RETURN LOSS (9dB)	NEXT WORST PAIR (dB)	IMPEDANCE (Ohm)
1.00	2.4	20.0	65.3	
4.00	4.9	23.0	56.3	
8.00	6.9	24.5	51.8	
10.00	7.8	25.0	50.3	100±15
16.00	9.9	25.0	47.3	
20.00	11.1	25.0	45.8	
25.00	12.5	24.2	44.3	
31.25	14.1	23.3	42.9	
62.50	20.4	20.7	38.4	
100.00	26.4	19.0	35.3	

ELECTRICAL PROPERTIES

Insulation Resistance	Min > 200 (MΩ*M) at 20°C
Conductor Resistance	Max < 9.51 (Ω/100M) at 20°C
Temperature rating (°C)	80
Voltage rating (V)	300

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office) 33-35 Alleyne Street, Chatswood, NSW, 2067
Brisbane Office
Melbourne Office 28 The Gateway, Broadmeadows, VIC, 3047
Adelaide Office 71 Anzac Highway, Ashford, SA, 5035

Phone: (02) 9414 8888
 Phone: (07) 3308 5555
 Phone: (03) 9330 8333
 Phone: (08) 8338 5540

Fax: (02) 9414 8800
 Fax: (07) 3308 5500
 Fax: (03) 9330 8330
 Mob: 0438 245 116

websales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au