

**ACCESS COMMUNICATIONS PTY LTD
Specification**

FIGURE-8 TRANSPARENT SPEAKER CABLE


Version: A-000
Page 1 of 1

ACCESS CAT # Y3424

1. CONSTRUCTION

| ITEM | | A.Q.L. | DESCRIPTION |
|------------|--------------------------|-------------------|--|
| Conductor | Core number / millimetre | 0.20 (± 0.008) | Stranded bare copper |
| | 2 x 0.20mm x 79 | | |
| Insulation | External dimension (mm) | 3.60mm (± 0.35mm) | Small white stripe on one of the two transparent PVC insulation. |
| | 3.60 x 7.20mm PVC | 7.20mm (± 0.60mm) | |

2. DESIGN

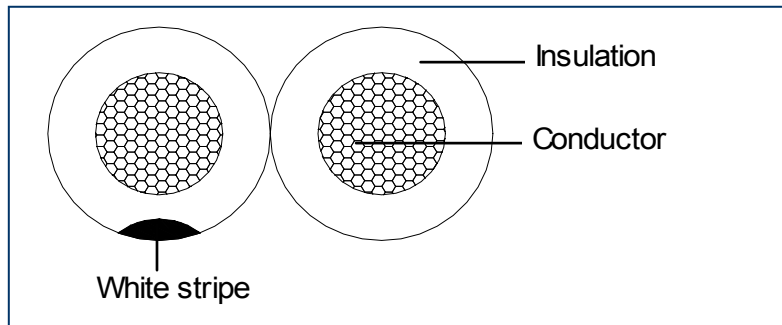

3. CHARACTERISTICS

| ITEM | DESCRIPTION | STANDARDS |
|------------|--|-----------------------|
| Cond res | conductor DC resistance @ 20 degrees C | <0.88 Ω per 100 metre |
| Insul res | insulation resistance @ 20 degrees C | >200 MΩ per metre |
| Rated temp | ----- | 70 degrees C |

C-2093

Date: 050322