

**ACCESS COMMUNICATIONS PTY LTD  
Specification**

**FIGURE-8 TRANSPARENT SPEAKER CABLE**


**ACCESS CAT # Y3428**

Version: A-000  
Page 1 of 1

**1. CONSTRUCTION**

ITEM		A.Q.L.	DESCRIPTION
Conductor	Core number / millimetre	0.12 (± 0.008)	Stranded bare copper
	2 x 0.12mm x 37 x 7	259 (± 5)	
Insulation	External dimension (mm)	5.05mm (± 0.50mm)	Small blue stripe on one of the two transparent PVC insulation.
	5.05 x 10.10mm PVC	10.10mm (± 1.00mm)	

**2. DESIGN**

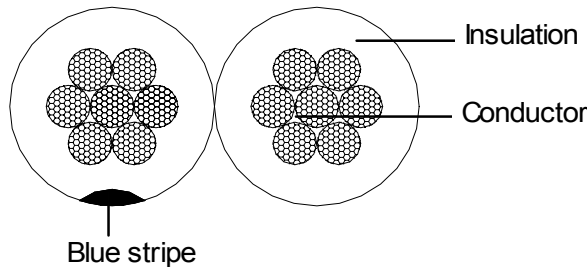

**3. CHARACTERISTICS**

ITEM	DESCRIPTION	STANDARDS
Cond res	conductor DC resistance @ 20 degrees C	<0.27 Ω per 100 metre
Insul res	insulation resistance @ 20 degrees C	>200 MΩ per metre
Rated temp	-----	70 degrees C

C-2093

Date: 050322