
European Plug Power Cord 2 metre IEC-C7 Connector Two Pin Plug




■ FEATURES

- 2-core light duty power cord as used on some small appliances.
- Fitted with IEC-C7 (figure-8) connector and Australian 2-pin mains plug with insulated pins compliant with AS/ NZS3112.
- Electrical Safety Authority Approved.

DESIGN & CONSTRUCTION



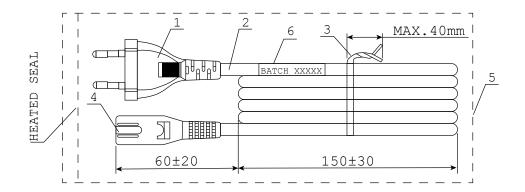




European Plug Power Cord 2 metre IEC-C7 Connector Two Pin Plug

1	PVC Moulded Plug	PHP 205 (Black)	
2	PVC Flexible Cord	H03WH2 F 2 x 0.75mm² (Black)	
3	Vinyl Tie (Black)	Tied twice with PVC elliptic tie	
		Elliptic tie loose and section must not exceed 40mm	
4	PVC Moulded Connector	PHS 204 (Black)	
5	PE Sack	280mm x 130mm (0.05mm thick)	
6	Label	40 x 25mm	NOTE: ALL MATERIALS ARE ROHS COMPLIANT

EUROPEAN MAINS PLUG

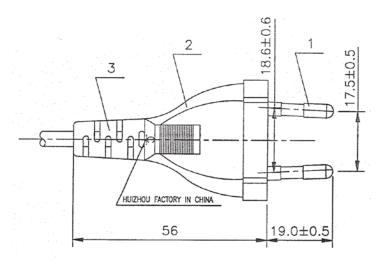


SIDE B: PHP-205 2.5A 250V ~

1.PIN

2.PVC Moulded plug: PHP - 205

3.Flexible cord

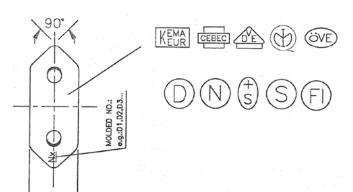

TOLERANCE:


 $> 20 : \pm 2.0$ ≤ 20 : **± 1.0** $\leq 10 : \pm 0.5$ $\leq 1.0 : \pm 0.3$

13.7±0.7




European Plug Power Cord 2 metre IEC-C7 Connector Two Pin Plug

K3762EL

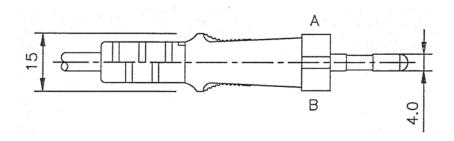


CORD SECTION



PHINO Cabo H03VVH2-F 2X0.75mm² \triangleleft VDED KEMA-KEUR IEMMEQU $+ \wp + \wp + \wp + \wp$ \triangleleft öVED CEBEC (S) (N) (D) (F) SABS SANS 60227-5 60227 IEC 52 300/300V (€ Cn -LF-


IEC-C7 CONNECTOR

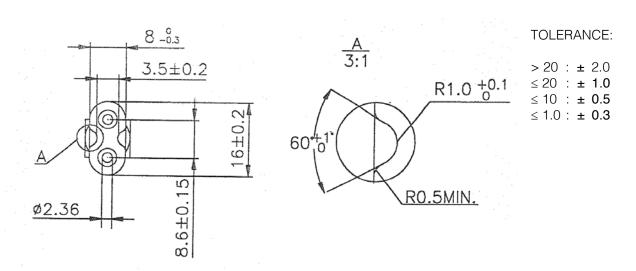



European Plug Power Cord 2 metre IEC-C7 Connector Two Pin Plug

K3762EU

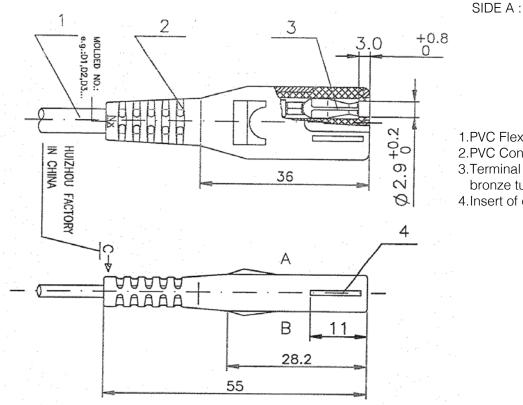





- 1.PVC Flexible cord 2.PVC Connector body
- 3.Terminal: Ø 2.36 Phosphor
- bronze tube
- 4.Insert of connector