TELEMASTER

6P4C Modular Plugs Round/Solid/Flat/Stranded P2033, P2034, P2035, P2045




FEATURES

Generally used for termination of line cords. Plugs with 50µ", 30µ", 15µ" or 6µ" gold plated contacts are available.

Packed in bags of 20, 50, 100 or bulk. Plugs for stranded or solid conductors with round or flat cord entry are stocked.

CAT#	TYPE	CONDUCTOR TYPE	PACKING
P2033	6P6C	Flat / Stranded	20 Pieces
P2034	6P6C	Flat / Stranded	50 Pieces
P2035	6P6C	Flat / Stranded	100 Pieces
P2045	6P6C	Round/ Solid	100 Pieces

DESIGN & CONSTRUCTION

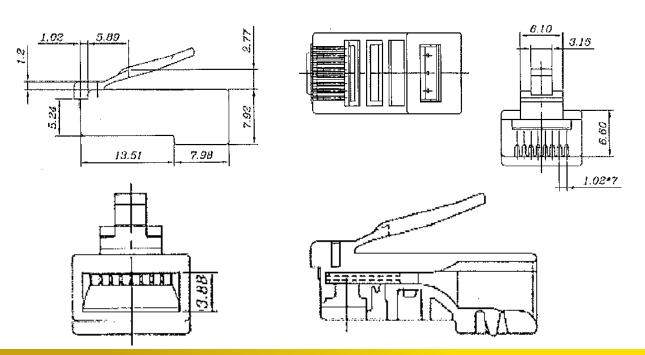

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)

TELEMASTER



6P4C Modular Plugs Round/Solid/Flat/Stranded P2033, P2034, P2035, P2045

ELECTRICAL SPECIFICATIONS				
UL Applications	250 Volts AC Max at 2 AMPS			
Dielectric Withstanding Voltage	500V AC			
Insulation Resistance	100 ΜΩ			
Termination	Resistance 20 MΩ Max after environmental testing			

MATERIAL SPECIFICATIONS				
Housing	Polycarbonate UL 94V-0			
Colour	Transparent			
Contact Blade	Copper Alloy			
Conductor	Stranded 24AWG, 26AWG, 28AWG			
Gold Plating	30μ			

MECHANICAL SPECIFICATIONS

Cable to Plug Tensile Strength 19.6N / PCS Min Durability 200 Mating Cycles

USAGE SPECIFICATIONS

Suitable for stranded and solid wire 24 AWG ~ 28 AWG

PRODUCT PACKAGING





