

Line Interactive UPS Smart King Pro



FEATURES

The Powercom Smart King Pro Line Interactive UPS, your advanced power protection solution. This UPS is equipped with a built-in Automatic Voltage Regulator (AVR) to stabilise fluctuating voltage, ensuring your devices receive clean and reliable power. With a clear LCD display, auto self-diagnosis, pure sine wave output, and remote monitoring capabilities, it's the ultimate UPS for your needs.

Main Features:

- **Build-in Automatic Voltage Regulator (AVR):** The UPS is equipped with AVR to stabilise fluctuating voltage, ensuring your devices receive consistent and reliable power.
- **Simple & Clear LCD Display:** Enjoy clear and easy-to-read LCD indicators, providing essential information at a glance.
- **Auto Self-Test Diagnose:** The UPS performs self-tests to diagnose its status and ensure optimal performance.
- **Emergency Alarm Warning:** In case of issues, the UPS provides immediate alarm warnings for quick response.
- **Pure Sine Wave Safety Output:** The UPS delivers a high-quality pure sine wave output to ensure the safety of your connected load.
- **Green Mode Energy-Saving Design:** Enjoy power savings with a green mode energy-saving design that prolongs the UPS's usage age.
- **Surge, Short Circuit, and Overload Protection:** The UPS offers reliable protection against power surges, short circuits, and overloads, ensuring the safety of your critical devices.
- **Simple and Easy Battery Replacement Process:** Easily replace the UPS battery when needed, ensuring uninterrupted power protection.
- **UPSMON PRO and APP:** Monitor your UPS status instantly through remote control systems, ensuring you stay informed and in control.

MODEL	DIMENSIONS	WEIGHT	SHIP DIMENSIONS	SHIP WEIGHT
SPT-500A	102 x 326 x 165mm	6.2kg	196 x 410 x 263mm	7.2kg
SPR-500A	428 x 335 x 44mm	8.9kg	563 x 473 x 168mm	10.9kg
SPT-700A	102 x 326 x 165mm	6.8kg	196 x 410 x 263mm	7.8kg
SPR-700A	428 x 335 x 44mm	9.1kg	563 x 473 x 168mm	11.1kg
SPT-1000A	140 x 380 x 210mm	14kg	258 x 487 x 326mm	15.4kg
SPR-1000A	428 x 431 x 84mm	14.4kg	577 x 590 x 211mm	18.2kg
SPT-1500A	140 x 380 x 210mm	15kg	258 x 487 x 326mm	16.4kg
SPR-1500A	428 x 431 x 84mm	16.7kg	577 x 590 x 211mm	20.4kg
SPT-2000A	140 x 380 x 210mm	17.5kg	258 x 487 x 326mm	18.9kg
SPR-2000A	428 x 431 x 84mm	18.8kg	577 x 590 x 211mm	22.6kg
SPT-3000A	170 x 450 x 226mm	25.4kg	298 x 356 x 553mm	28.2kg
SPR-3000A	428 x 562 x 84mm	26.5kg	577 x 720 x 211mm	30.5kg

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office


Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540


sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

Line Interactive UPS Smart King Pro


STANDARD OUTLET




SPT-500-700A




SPT-1000-2000A




SPT-3000A



SPR-500-700A

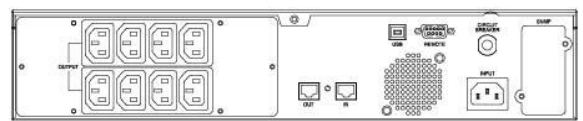

SPR-1000-2000A



SPR-3000A

Line Interactive UPS Smart King Pro

SPECIFICATIONS

	SPT-500A SPR-500A	SPT-700A SPR-700A	SPT-1000A SPR-1000A	SPT-1500A SPR-1500A	SPT-2000A SPR-2000A	SPT-3000A SPR-3000A
Configuration						
Capacity (VA)	500VA	700VA	1000VA	1500VA	2000VA	3000VA
Capacity (Watts)	400W	560W	800W	1200W	1600W	2400W
Form	Tower type: SPT Model Rack and Tower type: SPR model					
Input						
Voltage	100/110/120 VAC or 200/230/240 VAC					220/230/240 VAC
Input voltage range	75 150 or 165-300 VAC					165-300 VAC
Input frequency range	50 Hz / 60 Hz (Auto sensing)					
Output						
Waveform	Pure sine wave					
Voltage	100/110/120 VAC or 220/230/240 VAC					220/230/240 VAC
Frequency	50 Hz / 60 Hz \pm 0.0%					
Transfer time	2-4 ms (typical)					
Protection						
Full protection	Overload, surge, short circuit					
Telecommunication	RJ11 / RJ45 (Except SPR-500A/700A)					
Battery						
Type Quantity (Tower)	12V 7.2Ah x1	12V 9Ah x1	12V 7Ah x2	12V 7.2Ah x2	12V 9Ah x2	12V 7Ah x4
Type Quantity (Rack)	6V 7Ah x2	6V 9Ah x2	12V 7Ah x2	12V 7.2Ah x2	12V 9Ah x2	12V 7Ah x4
Sealed Maintenance Free	Yes					
Typical Recharge Time	3-4 hour to 90%					
Management & Communication						
Indicator (Tower)	LED Panel		LCD Panel			
Indicator (Rack)	LCD Panel		LCD Panel (Auto rotation)			
Communication Port (Tower)	USB B Type		USB B Type, RS232 & SNMP Slot			
Communication Port (Rack)	USB B Type, RS232 & SNMP Slot					
Physical						
SPT						
Dimensions	102 x 326 x 165mm		140 x 380 x 210mm			170 x 450 x 226mm
Weight	6.2kg	6.8kg	14kg	15kg	17.5kg	25.4kg

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

Line Interactive UPS Smart King Pro

SPECIFICATIONS

Shipping dimensions	196 x 410 x 263mm		258 x 487 x 326mm			298 x 356 x 553mm
Shipping weight	7.2kg	7.8kg	15.4kg	16.4kg	18.9kg	28.2kg
SPR						
Dimensions	428 x 335 x 44mm		428 x 431 x 84mm			428 x 562 x 84mm
Weight	8.9kg	9.1kg	14.4kg	16.7kg	18.8kg	26.5kg
Shipping dimensions	563 x 473 x 168mm		577 x 590 x 211mm			577 x 720 x 211mm
Shipping weight	10.9kg	11.1kg	18.2kg	20.4kg	22.6kg	30.5kg
Alarm						
Overload / Fault	Continuous beeping					
Battery mode	Beep every 4 seconds					
Low Battery	Beep every 1 second					
Environment						
Operating humidity	0-95% RH at 0-40°C (non condensing)					
Audible noise	Less than 40 dB					

* Specifications are subject to change without further notice.

* Specifications are for reference, please refer to information based on real product.