

Cat6 UTP Patch Cable Pack of 10


W3750BLU-10, W3751BLU-10,
W3752BLU-10, W3753BLU-10,
W3755BLU-10



FEATURES

- Cat6 cable is standard for gigabit ethernet and other network protocols that are backward compatible with Cat5/5e and Cat3 standards
- Made from 100% oxygen-free copper
- 4 twisted pairs (multi-stranded) T568A colour code
- RJ45-RJ45 connectors with snagless boots
- Injection-moulded connectors ensure the highest quality and outstanding strain relief
- Supplied in plain bags in a pack of 10 for efficient storage and organisation
- Custom-made cables – lengths, colours and printing are also available

DESIGN & CONSTRUCTION

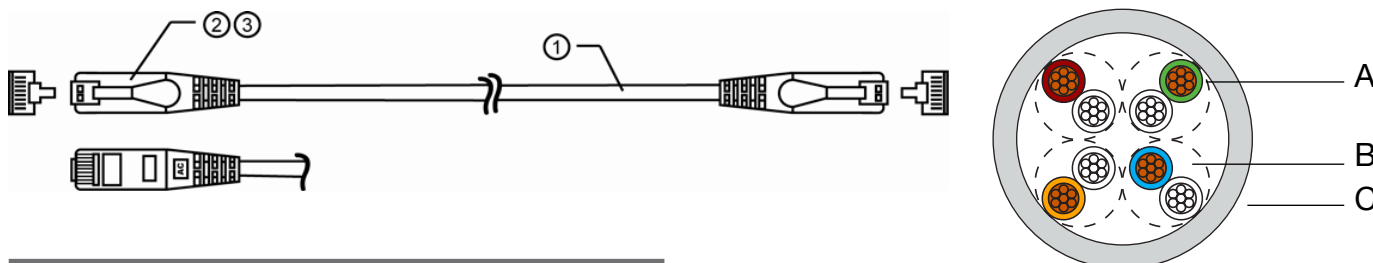

	DESCRIPTION	SPECIFICATION
1	Cable	UTP Cat-6; Stranded conductors; 24AWG
2	Jacket	50P PVC
3	Connectors	8P8C; 50µ" Gold plated, Molded boot

	DESCRIPTION	COLOUR	SPECIFICATION	MATERIALS
A	Conductor	Copper	0.203(+/-0.010)mm	Bare Copper
B	Insulation	Orange/White with Orange, Blue/White with Blue, Green/White with Green, Brown/White with Brown	1.01(+/-0.13)mm	SPE
C	Jacket	Various	5.50(+/-0.30)mm	FR-PVC

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

Cat6 UTP Patch Cable Pack of 10

W3750BLU-10, W3751BLU-10,
W3752BLU-10, W3753BLU-10,
W3755BLU-10

FREQUENCY (MHZ)	ATTENUATION (+/-15%dB)	RETURN LOSS (9dB)	NEXT WORST PAIR (dB)	IMPEDANCE (Ohm)
1.00	2.4	20.0	74.3	100±15
4.00	4.5	23.0	65.3	
8.00	6.4	24.5	60.8	
10.00	7.1	25.0	59.3	
16.00	9.1	25.0	56.2	
20.00	10.2	25.0	54.8	
25.00	11.4	24.2	53.3	
31.25	12.8	23.3	51.9	
62.50	18.5	20.7	47.4	
100.00	23.8	19.0	44.3	
200.00	34.8	16.4	39.8	
250.00	39.4	15.6	38.3	

PINOUT		
J1	J2	COLOUR
1	1	Green/White
2	2	Green
3	3	Orange/White
4	4	Blue
5	5	Blue/White
6	6	Orange
7	7	Brown/White
8	8	Brown

TOLERANCE	
NOMINAL LENGTH	TOLERANCE
500mm	± 10mm
1.0 Metre	± 15mm
2.0 Metre	± 20mm
3.0 Metre	± 30mm
5.0 Metre	± 50mm

ELECTRICAL PROPERTIES	
Insulation Resistance	Min > 200 (MΩ*M) at 20°C
Conductor Resistance	Max < 9.61 (Ω/100M) at 20°C
Temperature rating (°C)	75
Voltage rating (V)	300
Dielectric Strength	AC-500V/1 Min

CAT#	LENGTH	COLOUR
W3750BLU-10	500mm	Blue
W3751BLU-10	1.0 Metre	Blue
W3752BLU-10	2.0 Metre	Blue
W3753BLU-10	3.0 Metre	Blue
W3755BLU-10	5.0 Metre	Blue

COMPLIANCE

- RoHS III EU/2015/863
- REACH SVHC x 219 (EC 1907/2006)
- ISO/IEC 11801 Category 6
- TIA/EIA-568-C.2
- AS/CA S008:2020



To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au