## **DATAMASTER**



## Speaker Cable Fig-8 24/0.20 20 AWG 0.75mm


Y3405BLK, Y3405GRY, Y3405RED, Y3405WHI, Y3406BLK, Y3406GRY, Y3406RED, Y3406WHI, Y3407BLK, Y3407GRY, Y3407RED, Y3407WHI



#### FEATURES

- General purpose figure-8 cable suitable for speakers, security systems and other low voltage applications.
- Printing on one conductor provides easy identification to avoid polarity-reversals during installation.
- Each conductor has 24 strands of 0.20mm<sup>2</sup> diameter copper wire giving an overall conductor-size of 0.75mm<sup>2</sup>.
- Standard jacket colour is white. Supplied on 100, 250 and 500 metre strong polypropylene reels

### DESIGN & CONSTRUCTION

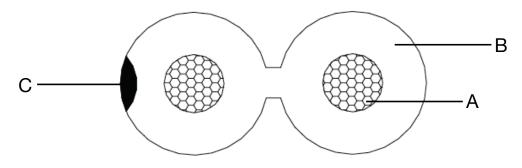

ITEM	DESCRIPTION	COLOUR	SPECIFICATION	MATERIALS
Α	Conductor		2/0.20 x 24mm	Stranded Bare Copper
В	Insulation	White and Grey	2.80 x 5.80 PVC	PVC
С	Black Stripe	Small Black Stripe on side of PVC Insulation	2.80 x 5.80 mm	PVC

## **DATAMASTER**



# Speaker Cable Fig-8 24/0.20 20 AWG 0.75mm Y3405BLK, Y3405GRY, Y3405RED, Y3405WHI,

Y3405BLK, Y3405GRY, Y3405RED, Y3405WHI, Y3406BLK, Y3406GRY, Y3406RED, Y3406WHI, Y3407BLK, Y3407GRY, Y3407RED, Y3407WHI

#### ■ PINOUT

CAT#	CONDUCTOR DC RESISTANCE (20°C)	INSULATION RESISTANCE (20°C)	A.Q.L	RATED TEMPERATURE
Y3405	$<$ 2.90 $\Omega$ / 100 Metres	$>$ 200M $\Omega$ / Metre	0.20 (± 0.008)	70°C
Y3406	$<$ 2.90 $\Omega$ / 100 Metres	$>$ 200M $\Omega$ / Metre	2.80 (± 0.20)	70°C
Y3407	$<$ 2.90 $\Omega$ / 100 Metres	$>$ 200M $\Omega$ / Metre	5.80 (± 0.35)	70°C

## I LENGTHS

CODE	LENGTH (METRE)	COLOUR
Y3405BLK	100M	BLACK
Y3405GRY	100M	GREY
Y3405RED	100M	RED
Y3405WHI	100M	WHITE
Y3406BLK	250M	BLACK
Y3406GRY	250M	GREY
Y3406RED	250M	RED
Y3406WHI	250M	WHITE
Y3407BLK	500M	BLACK
Y3407GRY	500M	GREY
Y3407RED	500M	RED
Y3407WHI	500M	WHITE

## **REGULATORY COMPLIANCE**

