

Speaker Double Insulated 24/0.20 Yellow


Y3451YEL



FEATURES

- Quality high grade, double insulated 2-conductor speaker cable with Yellow PVC jacket.
- Red and White conductor insulation for instant identification to avoid polarity-reversals during installation.
- Applications include surround sound speaker cabling and PA.
- Available on 100 metre, wooden reels or 305 metre pull-boxes.
- Count-down metre-marking.
- Other jacket colours can be custom made upon request.

DESIGN & CONSTRUCTION

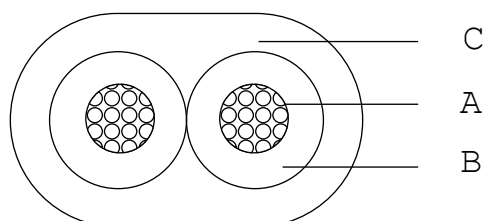

Conductors (A)	2 x 24/0.20 (+0.001 / -0.008)mm (0.75mm ² - 20AWG) stranded bare copper
Conductor Insulation (B)	2 x 2.40 (± 0.15)mm FR-PVC (Red / White)
Jacket (C)	3.60 (± 0.18)mm x 6.20 (± 0.25)mm Yellow FR-PVC

CONSTRUCTION DRAWING

CAT#	JACKET	CONDUCTORS	PACKING
Y3451YEL	3.5 X 6.0 mm	2 x 24/0.2mm ²	100 Metre Reel
Y3453YEL	3.5 X 6.0 mm	2 x 24/0.2mm ²	305 Metre Pull-Box

Speaker Double Insulated 24/0.20 Yellow

Y3451YEL

ELECTRICAL CHARACTERISTICS

Minimum conductor DC resistance	< 2.75 Ω / 1000 metres @20°C
Minimum insulation DC resistance	< 200M Ω / Metres @ 20°C
Rated temperature	80°C
Rated Voltage	600V

PHYSICAL CHARACTERISTICS

Minimum Bending Radius	15 x Dmm
Conductor Elongation	> 15% (at breaking point)
Sheath Tensile Strength	10.00N/mm ²
Sheath Elongation at break	125.0% (at breaking point)

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au