



4 Conductor Double Insulated Speaker Cable

Y3460 Series

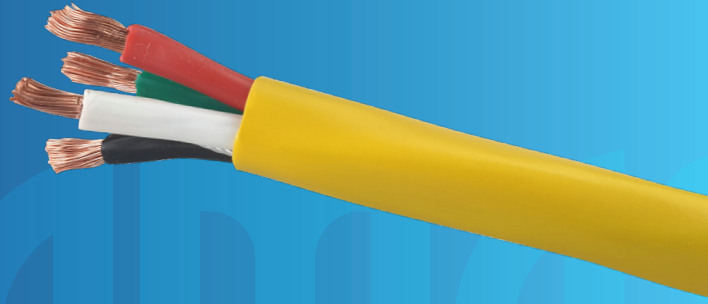

DESIGN & CONSTRUCTION

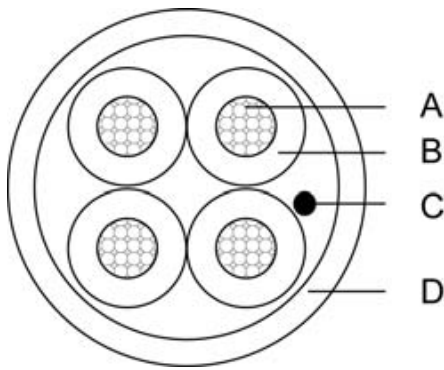

	DESCRIPTION	COLOUR	SPECIFICATION	MATERIALS
A	Conductor		4 x 65 / 0.16 (±0.008)mm (16AWG)	Stranded Bare Copper
B	Conductor Insulation (B)	Green / Red / White / Black	4 x 2.30 (± 0.15) mm	FR-PVC
C	Rip Cord			Nylon
D	Sheath	Yellow	6.40 (± 0.25)mm	FR-PVC

ELECTRICAL CHARACTERISTICS

Maximum Conductor DC Resistance	< 1.58 Ω 1000 Metres @ 20 °C
Minimum Insulation DC Resistance	> 200M Ω / Metre @ 20 °C
Rated Temperature	80 °C
Rated Voltage	300 V

PHYSICAL CHARACTERISTICS

Minimum Bending Radius	15 x Dmm
Conductor Elongation	> 15 % (at breaking point)
Sheath Tensile Strength	10.00N / mm ²
Sheath Elongation at Break	125.0% (at breaking point)

PACKING

Y3461YEL	100 Metre Reel
Y3462YEL	200 Metre Reel

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Office
Melbourne Office
Adelaide Office

33-35 Alleyne Street, Chatswood, NSW, 2067
 28 The Gateway, Broadmeadows, VIC, 3047
 71 Anzac Highway, Ashford, SA, 5035

Phone: (02) 9414 8888
 Phone: (07) 3308 5555
 Phone: (03) 9330 8333
 Phone: (08) 8338 5540

Fax: (02) 9414 8800
 Fax: (07) 3308 5500
 Fax: (03) 9330 8330
 Mob: 0438 245 116

websales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au