


Security Cable Pull Box Conductor Cable


Y4141GRY, Y4143GRY, Y4141WHI, Y4143WHI
Y4144WHI, Y4241GRY, Y4243GRY, Y4244GRY
Y4241WHI, Y4243WHI, Y4244WHI

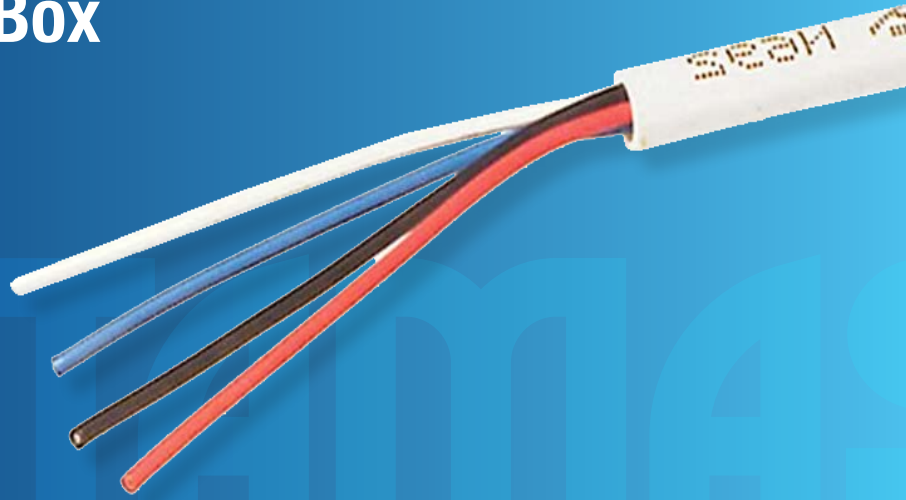

FEATURES

Multicore 4 conductor cable for security applications with either 7/0.20mm² or 14/0.20mm² stranding. Supplied on 100 and 305 metre strong polypropylene reels or 305 metre pull-boxes, all with count-down metre-marking. Other reel sizes or jacket colours can be custom made.

DESIGN & CONSTRUCTION

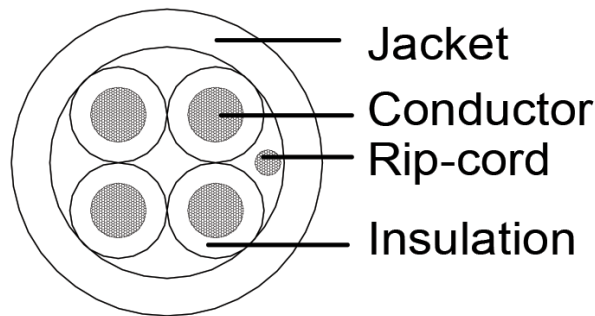

ITEM	NUMBER/MM	AQL	DESCRIPTION
Conductor	4 x 14 / 0.20 OR 4 x 7 / 0.20	0.20 (± 0.008)	Stranded bare copper
Insulation	4 x 1.50	1.50 (± 0.13)	Red, black, white and blue PVC insulation
Jacket OD	4.80	4.80 (± 0.30)	PVC jacket

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

Security Cable Pull Box Conductor Cable

Y4141GRY, Y4143GRY, Y4141WHI, Y4143WHI
Y4144WHI, Y4241GRY, Y4243GRY, Y4244GRY
Y4241WHI, Y4243WHI, Y4244WHI

ELECTRICAL CHARACTERISTICS

Conductor DC resistance	< 5.08 Ω / 100 metres @20°C
Rated temperature	70°C
Insulation resistance	300V

AUSTRALIAN COMPLIANCE

AS/NZS60950:2000 + A1

AS/ACIF S008:2001

AS/NZS3191:1996 Clause 3.8
(Combustion Propagation)

ACA Supplier code

