



7 - Core Shielded Security Cable Grey

Y4272GRYSCN

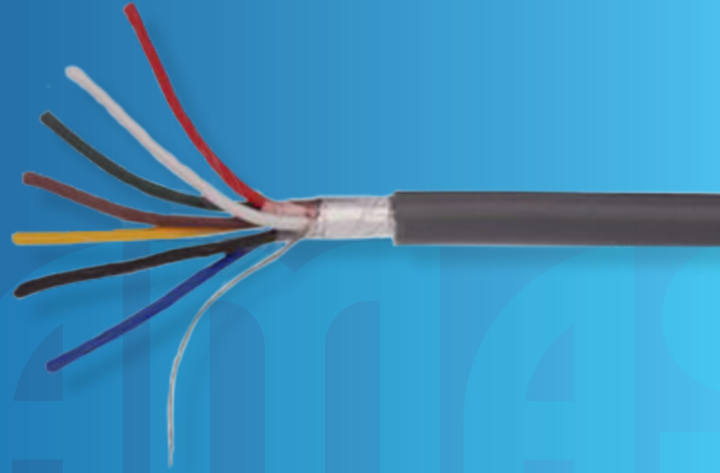

7 x 14 / 0.20

- Red
- Blue
- White
- Green
- Black
- Yellow
- Grey

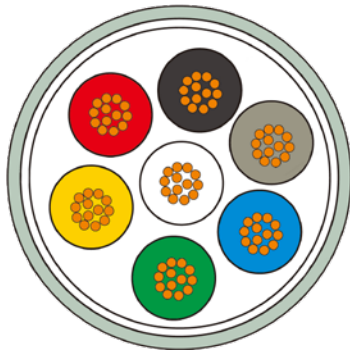

ELECTRICAL CHARACTERISTICS

Conductor Resistance	20°C Conductor DC Resistance 10 Ω / 100 M
Dielectric Test	1000V DC / 1 MIN ; No Breakdown
Temperature Rating	60 °C
Voltage Rating	30 V

MARKING

DATAMASTER □ □ E4073 □ Y4000 □ SERIES □ SECURITY □ CABLE □ 7x14/0.20MM □ SHIELDED □ XXXM

CONSTRUCTION

14 / 0.20 * 7C + M + D (16 / 0.14 BC) + A M + PVC 250M / Wooden Drum

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035


Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

7 - Core Shielded Security Cable Grey

Y4272GRYSCN

CONSTRUCTION DRAWING

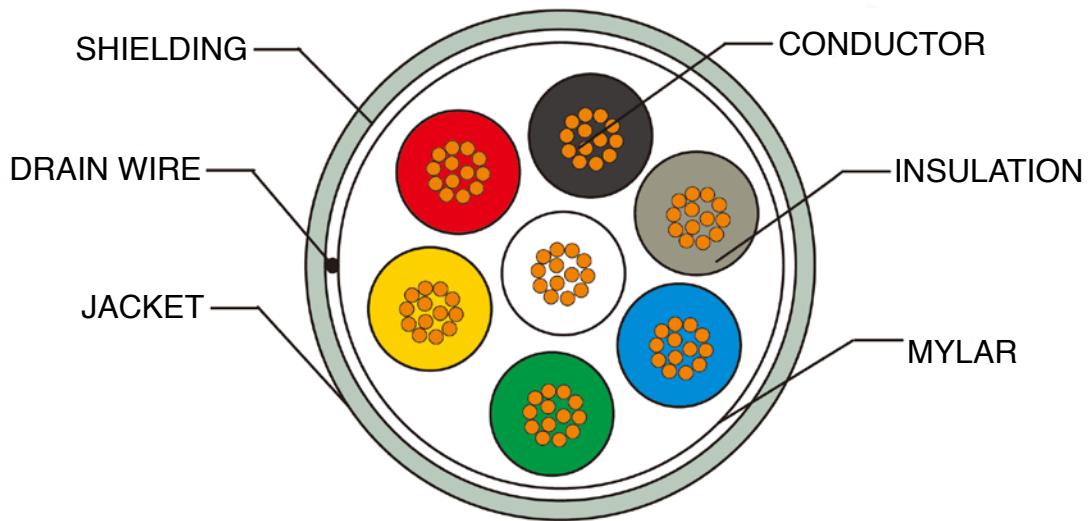

CONDUCTOR	Material Specifications	Copper 14 / 0.20
INSULATION RESISTANCE	Material Normal Thickness Diameter	PVC 0.36 ± 0.05mm 1.5 ± 0.05mm
MYLAR	Material Coverage	Mylar 100% Coverage
DRAIN WIRE	Material Construction	Bared Copper 16 / 0.14mm
SHIELDING	Material Coverage	Aluminium Mylar Spirally Wrapped 100% Coverage
JACKET	Material Thickness Normal Thickness Diameter Colour	PVC Extrusion 0.6mm (Min. Thickness 0.50mm) 6.0 ± 0.20 mm Grey

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au