



7 - Core Shielded Security Cable GREY; Y4272GRYSCN

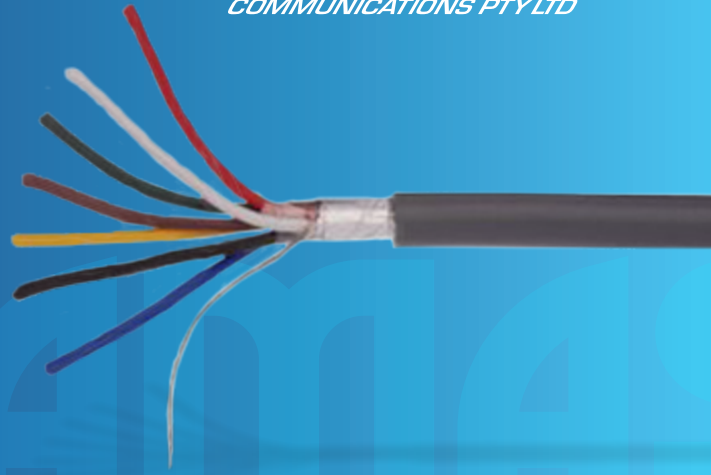

7 x 14 / 0.20


- Red
- Blue
- White
- Green
- Black
- Yellow
- Grey

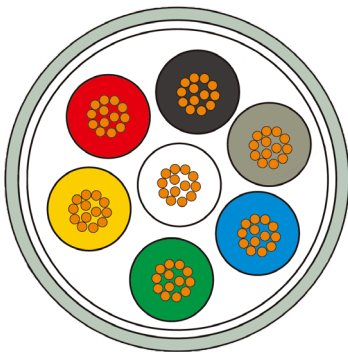

ELECTRICAL CHARACTERISTICS

Conductor Resistance	20°C Conductor DC Resistance 10 Ω / 100 M
Dielectric Test	1000V DC / 1 MIN ; No Breakdown
Temperature Rating	60 °C
Voltage Rating	30 V

MARKING


DATAMASTER □  □ E4073 □ Y4000 □ SERIES □ SECURITY □ CABLE □ 7x14/0.20MM □ SHIELDED □ XXXM

CONSTRUCTION


14 / 0.18 CCC * 7C + M + D (16 / 0.14 BC) + AM + PVC 250M / Wooden Drum

To view Access' extensive ranges go to: www.accesscomms.com.au

7 x 14/0.20 Security Cable GREY; Y4272GRYSCN

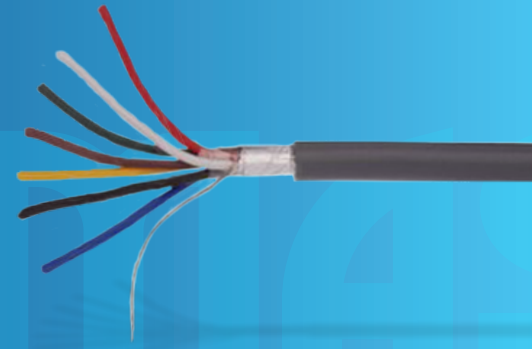

CONSTRUCTION DRAWING

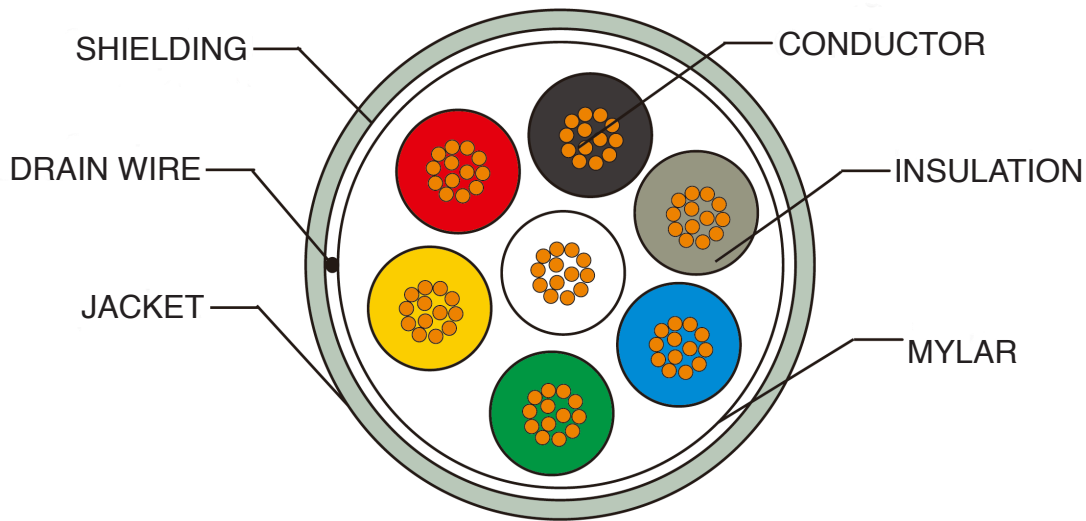

CONDUCTOR	Material Specifications	Copper 14 / 0.18
INSULATION RESISTANCE	Material Normal Thickness Diameter	PVC 0.36 ± 0.05mm 1.5 ± 0.05mm
MYLAR	Material Coverage	Mylar 100% Coverage
DRAIN WIRE	Material Construction	Bared Copper 16 / 0.14mm
SHIELDING	Material Coverage	Aluminium Mylar Spirally Wrapped 100% Coverage
JACKET	Material Thickness Normal Thickness Diameter Colour	PVC Extrusion 0.6mm (Min. Thickness 0.50mm) 6.0 ± 0.20 mm Grey

To view Access' extensive ranges go to: www.accesscomms.com.au