



6 Multicore Security Conductor Cable

Y4161GRY, Y4163GRY, Y4161WHI, Y4163WHI,
Y4164WHI, Y4261WHI, Y4263WHI, Y4264WHI

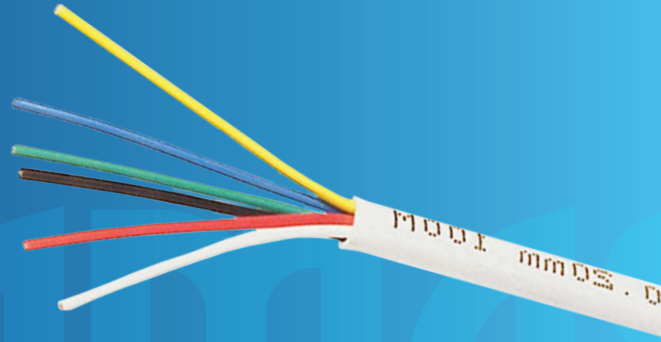

FEATURES

Multicore 6 conductor cable for security applications with either 7/0.20mm² or 14/0.20mm² stranding. Supplied on 100 and 305 metre strong polypropylene reels or 305 metre pull-boxes, all with count-down metre-marking. Other reel sizes or jacket colours can be custom made.



DESIGN & CONSTRUCTION

ITEM	Number / Millimetre	AQL	DESCRIPTION
Conductor	6 x 14 / 0.20 OR 6 x 7 / 0.20	0.20 (± 0.008)	Stranded Bare Copper
Insulation	6 x 1.25	1.25 (± 0.13)	Red, Yellow, Blue, Green, Black and White PVC Insulation
Jacket OD	5.10	5.10 (± 0.30)	PVC Jacket

CHARACTERISTICS

ITEM	DESCRIPTION	STANDARD
Conductor Resistance	20°C conductor DC Resistance	< 10.16 Ω / 100M
Rated Temperature		70°C
Insulation Resistance		300V

AUSTRALIAN COMPLIANCE

AS/NZS60950:2000 + A1
AS/ACIF S008:2001
AS/NZS3191:1996 Clause 3.8 (Combustion Propagation)

ACA SUPPLIER CODE:



To view Access' extensive ranges go to: www.accesscomms.com.au