


Cat5e Stranded Conductor FTP Shielded Cable

Y8153 Series Bulk Cable

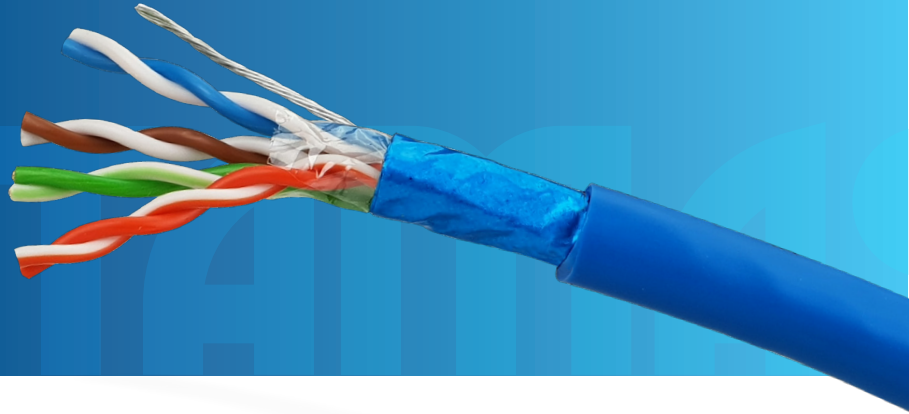

FEATURES

Shielded FTP (Foil Twisted Pair) Cat5e cable with 7/0.20mm² stranded conductors in 4 twisted pairs. Conductors are wrapped with aluminium foil shield and mylar tape. Tinned 7/0.30mm² drain wire. Count-down metre-marking.

CAT#	COLOUR	LENGTH	PACKING
Y8153BLU	Blue	305 Metre	Reel
Y8153GRY	Grey	305 Metre	Reel

REGULATORY COMPLIANCE



N692 Y8000 SERIES COMMUNICATIONS CABLE – FTP CAT.5E
VERIFIED TO TIA/568-B.2 24AWG X 4P STRANDED XXXM

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Office
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW, 2147

28 The Gateway, Broadmeadows, VIC, 3047
71 Anzac Highway, Ashford, SA, 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540


Fax: (02) 9414 8800
Fax: (07) 3308 5500
Fax: (03) 9330 8330

websales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

Cat5e Stranded Conductor FTP Shielded Cable

Y8153 Series Bulk Cable

DESIGN & CONSTRUCTION

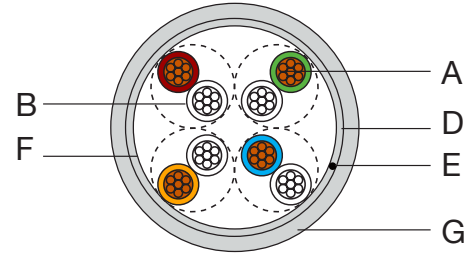

ITEM	DESCRIPTION	COLOR	SPECIFICATION	MATERIALS
A	Conductor	Copper	8/0.203(+/-0.008)mm	Bare Copper
B	Insulation	Orange/White with Orange, Blue/White with Blue, Green/White with Green, Brown/White with Brown	8/1.01(+/-0.13)mm	SPE
D	Shielding		Yes	Al-foil
E	Drain Wire		0.40	Stranded Tinned Copper
F	PE-Tape		Yes	
G	Jacket	Blue, Grey	5.50(+/-0.20)mm	FR-PVC

FREQUENCY (MHZ)	ATTENUATION (+/-15%dB)	RETURN LOSS (9dB)	NEXT WORST PAIR (dB)	IMPEDANCE (Ohm)
1.00	2.4	20.0	65.3	
4.00	4.9	23.0	56.3	
8.00	6.9	24.5	51.8	
10.00	7.8	25.0	50.3	100±15
16.00	9.9	25.0	47.3	
20.00	11.1	25.0	45.8	
25.00	12.5	24.2	44.3	
31.25	14.1	23.3	42.9	
62.50	20.4	20.7	38.4	
100.00	26.4	19.0	35.3	

ELECTRICAL PROPERTIES

Insulation Resistance	Min > 200 (MΩ*M) at 20°C
Conductor Resistance	Max < 9.51 (Ω/100M) at 20°C
Temperature rating (°C)	80
Voltage rating (V)	300

To view Access' extensive ranges go to: www.accesscomms.com.au