


2 Pair Screened Data Cable

Y8408 Series Bulk Cable

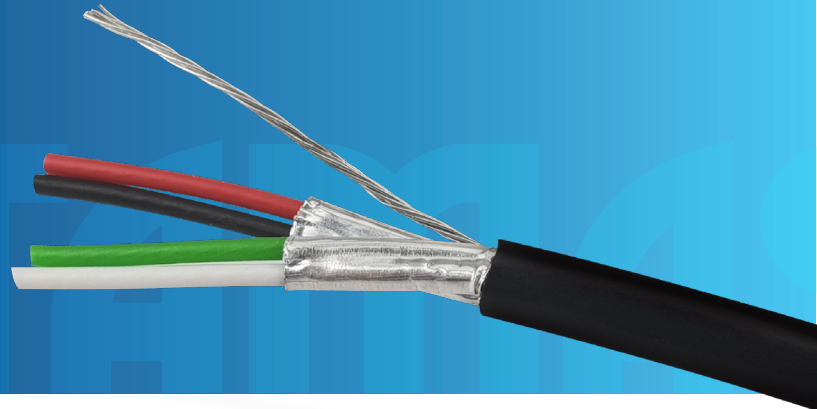


FEATURES

The individual shielded twisted pairs are great for many applications. The cable offers protection against electrical magnetic interference with the use of aluminium-polyester shielding. Widely used for Industrial Automation, Aerospace, Communication, Automotive. PVC outer jacket material.

CAT#	COLOUR	LENGTH	PACKING
Y8408100	Black	100 Metre	Reel
Y8408300	Black	300 Metre	Reel

DESIGN & CONSTRUCTION

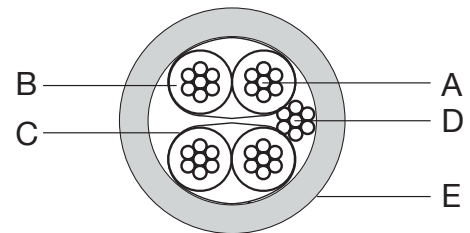

ITEM	DESCRIPTION	COLOR	SPECIFICATION	MATERIALS
A	Conductor	Copper	4 / T0.25 (+/- 0.008)mm x 7	Stranded Tinned Copper
B	Insulation	Green/White, Red/Black	4 / 1.20mm (+/- 0.13)mm	PP Insulation
D	Shielding		100% coverage with 25% overlapping	Al-foil
E	Drain Wire		T0.20 (+/- 0.008)mm x 7	Stranded Tinned Copper
F	Jacket	Black	4.10 (+/- 0.20)mm	FR-PVC

ELECTRICAL PROPERTIES

Insulation Resistance	Min. >200 ($\Omega/100M$) at 20°C
Conductor Resistance	Max. <6.02 ($M\Omega * M$) at 20°C
Temperature rating (°C)	80
Voltage rating (V)	300

CABLE MARKINGS

Y8408100		Y8400 SERIES DATAMASTER 2 PAIR SHIELDED + DRAIN WIRE XXXM
Y8408100		Y8400 SERIES DATAMASTER 2 PAIR SHIELDED + DRAIN WIRE XXXM

To view Access' extensive ranges go to: www.accesscomms.com.au