

Cat6 Solid Conductor FTP Shielded Cable

Y8553 Series Bulk Cable




DATAMASTER

FEATURES

FTP (Foil Twisted Pair) Cat6 cable for premises wiring and applications where shielded cable is required. 4 twisted pairs with OFC solid bare copper conductors suitable for IDC terminations to patch panels and wall jacks. Conductors are wrapped with aluminium foil shield and Mylar tape. Tinned drain wire. Available on durable 305 metre reels. Count-down metre-marking.

CAT#	COLOUR	LENGTH	PACKING
Y8553BLU	Blue	305 Metre	Reel
Y8553PNK	Pink	305 Metre	Reel
Y8553RED	Red	305 Metre	Reel

DESIGN & CONSTRUCTION

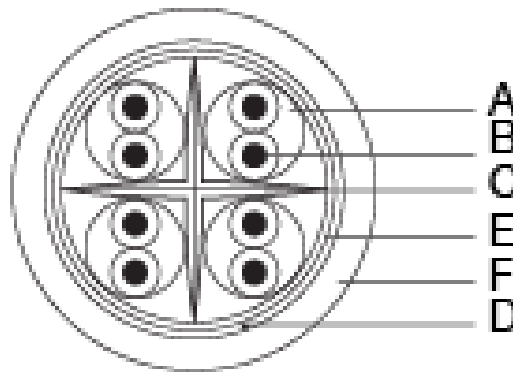

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

Cat6 Solid Conductor FTP Shielded Cable

Y8553 Series Bulk Cable

ITEM#	DESCRIPTION	COLOUR	SPECIFICATION	MATERIALS
A	Conductor	Copper	AWG 23 8/0.585 (±0.005)mm	CFC bare copper
B	Insulation	Orange/white with orange, blue/white with blue, green/white with green brown/white with brown	Average thickness(0.218 mm) Minimum point thickness (0.198 mm) Diameter (±0.01mm) 1.02 Twisted pair diameter (±0.01mm) 2.04	PE
C	Separator			LDPE
D	Drain wire		Thickness 0.40mm	Tinned copper
E	Shielding			Aluminium foil
F	Jacket		Average thickness (0.65mm) Minimum point thickness (0.60mm) Outer diameter (±0.30mm) 8.0	PVC

FREQUENCY (MHz)	RETURN LOSS (MIN dB)	ATTENUATION (Max dB/100m)	NEXT (Min dB)	PS NEXT (Min dB)	EL FEXT (Min dB)	PS EL FEXT (Min dB)	DELAY (Max dB/100m)	Impedance (Ohm)
1	20	2.1	74.3	72.3	67.8	64.8	570	
4	23	3.8	65.3	63.3	55.8	52.8	552	
8	24.5	5.3	60.8	58.8	49.7	46.7	547	
10	25	5.9	59.3	57.3	47.8	44.8	545	
16	25	7.5	56.2	54.2	43.7	40.7	543	
20	25	8.4	54.8	52.8	41.8	38.8	542	
25	24.3	9.4	53.3	51.3	39.8	36.8	541	100±15
31.25	23.6	10.5	51.9	49.9	37.9	34.9	540	
62.50	21.5	15	47.4	45.4	31.9	28.9	539	
100	20.1	19.1	44.3	42.3	27.8	24.8	538	
200	18	27.6	39.8	37.8	21.8	18.8	537	
250	17.3	31.1	38.3	36.3	19.8	16.8	536	
300	16.8	34.3	37.1	35.1	18.3	15.3	536	
400	15.9	40.1	35.3	33.3	15.8	12.8	536	

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

Cat6 Solid Conductor FTP Shielded Cable

Y8553 Series Bulk Cable

ELECTRICAL CHARACTERISTICS

Resistance U Balance	≤5
Conductor Resistance	Max 68.5 (Ω/km) at 20°C
Temperature Rating (°C)	75
Voltage Rating (V)	30
NVOP	69%
1.0 ~ 2.50.0MHz Delay Skew (ns/100m)	≤45

REGULATORY COMPLIANCE



Y8553 SERIES COMMUNICATION CABLE
-FTP CAT6 ISO/IEC11801 & TIA/EIA - 568C.2

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147
28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au