

## Cat6a UTP LAN LSZH Cable 305m Reel

Y8750 Reel




### FEATURES

- Cat6a UTP Lan Cable is ideal for premises wiring.
- All Datamaster Ethernet Cables are Fluke® tested and are manufactured to exceed Australian standards.
- Datamaster's 6a Ethernet Cable allows for extremely high data rate transmission of up to 10Gbps and at a frequency of 500Mhz, supporting the fastest ethernet applications.
- Made from 100% Oxygen-Free Copper, Low Smoke Zero Halogen (LSZH), Tinned drain wire, supplied on a reel, with count-down metre-marking.

CAT#	COLOUR	LENGTH	PACKING
Y8750BLU	BLUE	305 Metre	Reel

### DESIGN & CONSTRUCTION

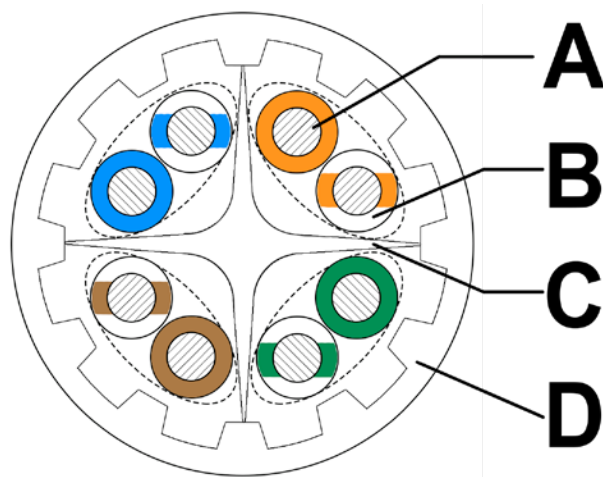

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

Sydney (Head Office)  
Brisbane Sales  
Melbourne Office  
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147  
28 The Gateway, Broadmeadows VIC 3047  
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888  
Phone: (07) 3308 5555  
Phone: (03) 9330 8333  
Phone: (08) 8338 5540

[sales@accesscomms.com.au](mailto:sales@accesscomms.com.au)  
[brisbane@accesscomms.com.au](mailto:brisbane@accesscomms.com.au)  
[melbourne@accesscomms.com.au](mailto:melbourne@accesscomms.com.au)  
[adelaide@accesscomms.com.au](mailto:adelaide@accesscomms.com.au)

## Cat6a UTP LAN LSZH Cable 305m Reel

Y8750 Reel

ITEM	DESCRIPTION	COLOUR	SPECIFICATION	MATERIALS
A	Conductor	Copper	23 AWG ; 1 / 0.565 ± 0.008 mm	Bare copper
B	Insulation		0.232 mm (thickness) 1.03 ± 0.05 mm (diameter)	HDPE
C	PE Cross		4.4 mm x 4.4 mm	Polyethylene
D	Jacket	Blue	1.25 mm (Min. Thickness: 0.65mm) 7.6 ± 0.20 mm (diameter)	LSZH
	Rip Cord			Nylon

### ELECTRICAL CHARACTERISTICS

Insulation Resistance	Min 5000 MΩ - km at 20°C
Dielectric Test	1000V DC/1 min no breakdown
Temperature Rating	60°C
Voltage Rating	30V
Test	Pass fluke TIA Cat6A channel test
Construction	1/0.565BC X 4P + PE CORSS + 7.6LSZH

### REGULATORY COMPLIANCE



Y8750BLU DATAMASTER UTP CABLE 23AWG  
4PR ANSI/TIA 568C.2 DAT 6A LSOH XXXM  
("XXXM" IS 305 M 001M)