


## Flat Modular Line Cord

8C Y9400 Series

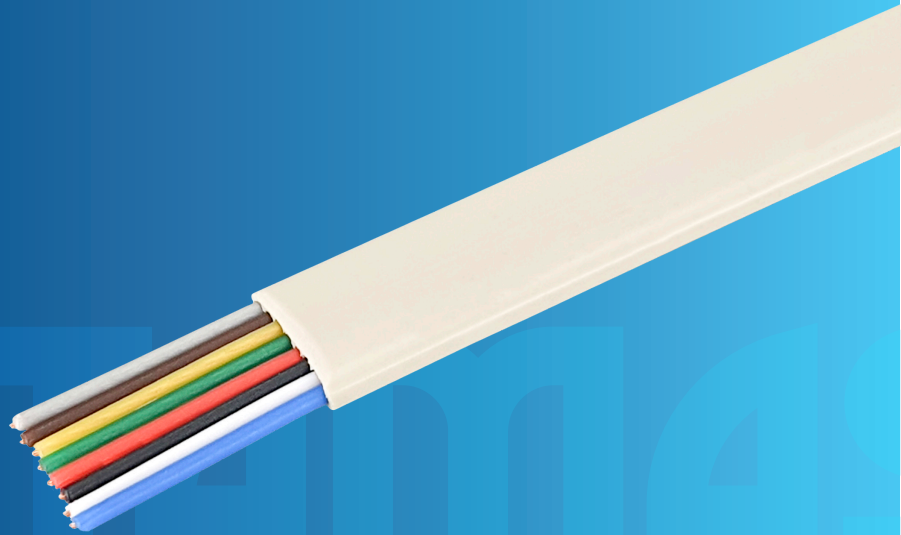

### FEATURES

Flat multiconductor cables are used in applications where a low profile is required. This is often the case for under carpet installations. Datamaster Multicore Flat Line product range is used to connect telephones, modems and emergency lighting. It can also be used for analogue intercom systems. Flat profiled cables can also be used for temporary installations where cabling thru the roof or wall space would be considered to expensive or difficult to implement. Datamaster flat cables are PVC insulated and PVC jacketed and come in 4, 6, 8 and 10 core versions.

CAT#	COLOUR	LENGTH	CONDUCTORS
Y9401	Ivory	100m	8 C
Y9406	Ash	100m	8 C
Y9411	Black	100m	8 C
Y9400	Ivory	500m	8 C
Y9405	Ash	500m	8 C
Y9410	Black	500m	8 C

### ELECTRICAL CHARACTERISTICS

CONDUCTOR RESISTANCE	< 1.34 $\Omega$ per metre
INSULATION RESISTANCE	> 100 M $\Omega$ per km
WITHSTANDING VOLTAGE	1.5KV AC RMS ( each conductor to other conductors ) 3.0KV AC RMS ( all conductors to sheath exterior )

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

## Flat Modular Line Cord


Y9300 Series



### MECHANICAL CHARACTERISTICS

PLUG PULL FORCE	50 Newtons
TERMINAL CRIMPING STRENGTH	2KGs

### CABLE CONSTRUCTION

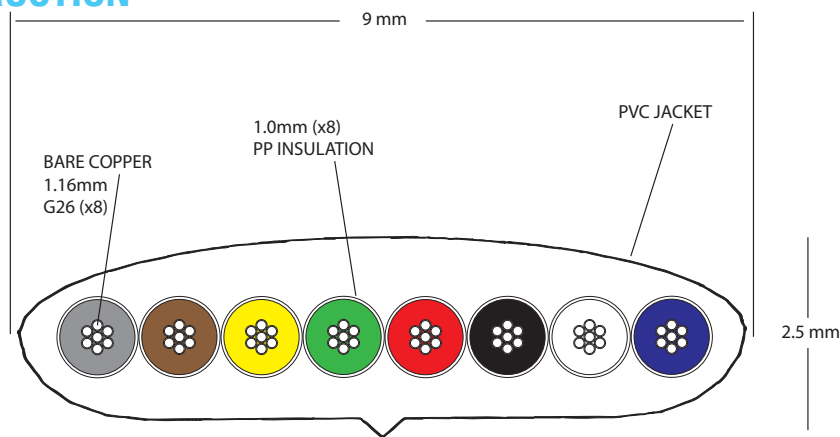

### MATERIAL CHARACTERISTICS

JACKET	PVC ( Polyvinylchloride )
INSULATION	PP ( Polypropolyne )
CONDUCTORS	28 AWG, 7-Strand Copper, diameter 0.12mm per strand (with optional multi-strand nylon filler)

### AUSTRALIAN COMPLIANCE

ACA SUPPLIER CODE	N692
AUSTRALIAN STANDARD	AS / ACIF S008 : 2001

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)