

## 3-IN-1 Toner Tracer Cable Tester

T0116




### FEATURES

3-in-1 Toner Tracer Cable Tester designed to test RJ-45 LAN cable, BNC and "F" coaxial cables, tone generator, continuity and 6P2C/4P2C jacks. This tester is specifically designed for use with electricians, service technicians, telecommunications workers and networking or general home use testing.

The unit has a visual and audio alert for OPEN/SHORT values. A PASS indicator is used for tests which show no failuers.

Tester Kit Unit includes:

- Probe Tester
- Unit Indicator
- Eight IDs
- 9V battery
- BNC adapter
- Travel bag

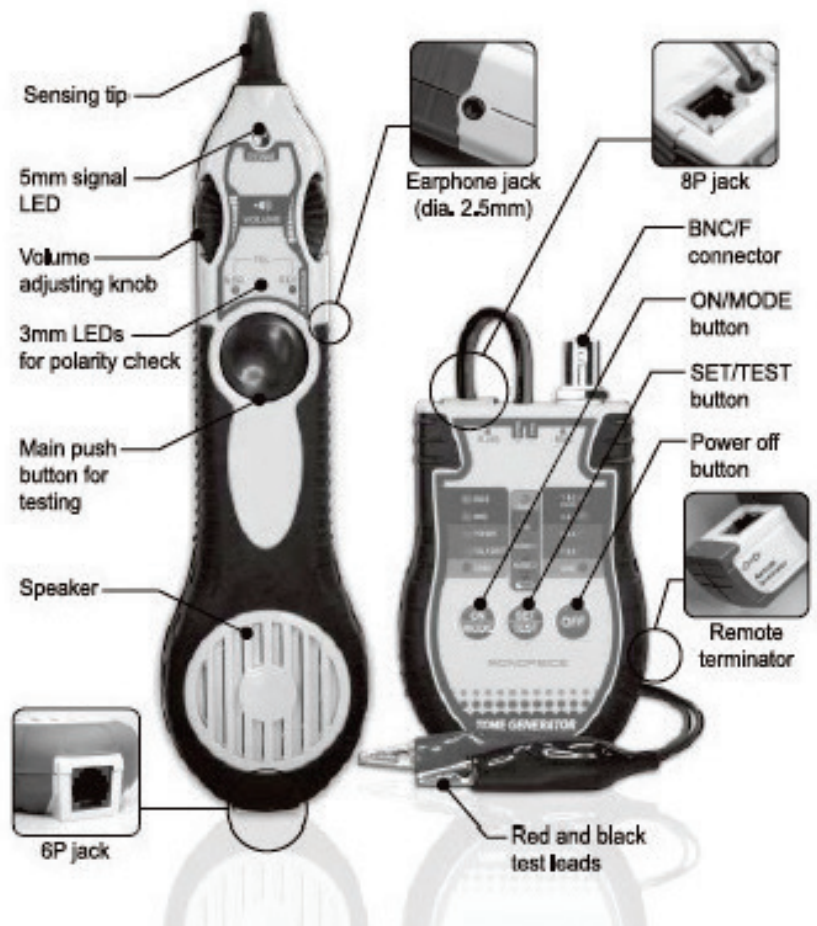

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

## 3-IN-1 Toner Tracer Cable Tester

T0116



### SPECIFICATION

<b>Tone Frequency</b>	1kHz
<b>Frequency Tempo</b>	Fast / Slow
<b>Output Voltage</b>	5V p-p
<b>Test Port</b>	RJ45 / BNC / RB Alligator
<b>Continuity Test</b>	Max. 4KΩ
<b>Measure Cable Lengths</b>	Maximum 1000ft
<b>Talk Battery Function</b>	8.5V / 750Ω
<b>Function Switch</b>	One Button Switch
	RJ45 / Talk Bat / Tone / Cont / BNC
<b>Low Battery Indication</b>	Under 7V
<b>TIA/EIA-568-B Cable Test</b>	Open, Short, Pass
<b>Battery</b>	9V
<b>Dimension (L*W*D)</b>	102mm * 70mm * 36mm

### TECHNICAL DATA

<b>Display</b>	LEDs, Music
<b>Operating Voltage</b>	Amplifier Probe - 9V Battery x 1PC Tone Generator / Cable Tester - 9V Battery x 1PC
<b>Weight</b>	Amplifier Probe - 115g (not including battery) Tone Generator / Cable Tester - 137.2g (not including battery)
<b>Dimensions ( L x W x H )</b>	Amplifier Probe - 230mm(L) x 60.3mm(W) x 28mm(H)mm Tone Generator / Cable Tester - 104mm(L) x 70mm(W) 36mm(H)
<b>Accessories</b>	BNC to CAT V Female Adaptor x 1PC 50 BNC Terminator x 1PC Zipper Carry Bag x 1PC 9V Batteries x 1PC Belt Clip x 1PC User Guide x 1PC

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)