

Figure-8 Speaker Cable 100m Reel 12AWG


Y3428



FEATURES

Quality high grade, heavy duty figure-8 speaker cable with transparent PVC jacket. Blue trace-line on one conductor provides easy identification to avoid polarity-reversals during installation. (7x37)259/0.12mm² (12AWG) twisted conductors. Supplied on 100 metre, strong polypropylene reels with count-down metre-marking.

CONSTRUCTION FEATURES

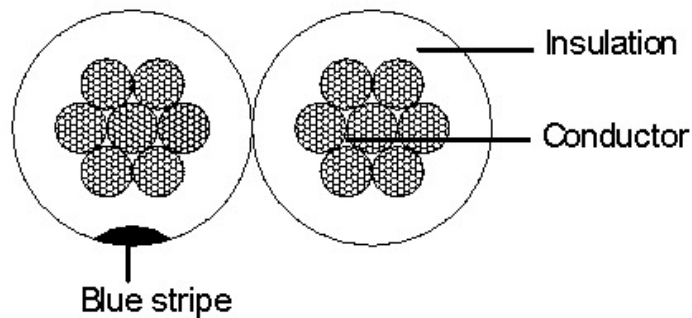

CONSTRUCTION FEATURES

ITEM		A.Q.L.	DESCRIPTION
Conductor	Core Number / Millimetre	0.12 (± 0.008)	Stranded Bare Copper
	2 x 0.12mm x 37 x 7	259 (± 5)	
Insulation	External Dimension (mm)	5.05 mm (± 0.50 mm)	Small Blue Stripe on one of the two transparent PVC insulation
	5.05 x 10.10 mm PVC	10.10 mm (± 1.00 mm)	

CHARACTERISTICS FEATURES

ITEM	DESCRIPTION	STANDARD
CONDUCTOR	Conductor DC Resistance @ 20°C	< 0.27 Ω per 100 metres
INSULATION	Insulation Resistance @ 20°C	> 200 M Ω per metre
RATED TEMPERATURE	-----	70°C

To view Access' extensive ranges go to: www.accesscomms.com.au